
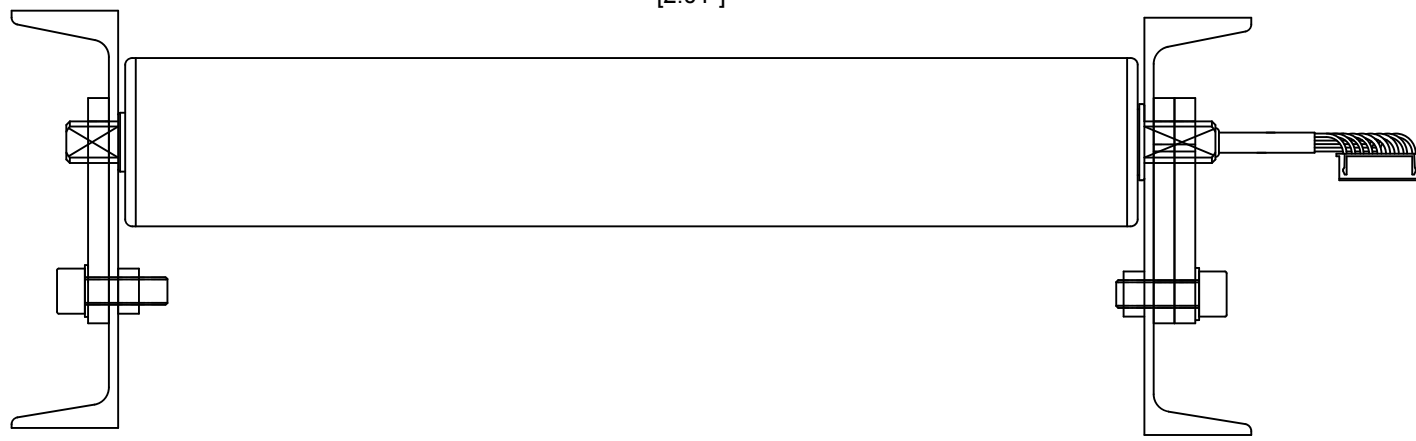


**MBK-0K1-7**  
**(USED ON SPRING-LOADED END)**


Use 1 bracket with matchmark facing out.

**MBK-0K1-6**  
**(USED ON CABLE END)**

Use 2 brackets together with the matchmark notches of each bracket on opposite ends.

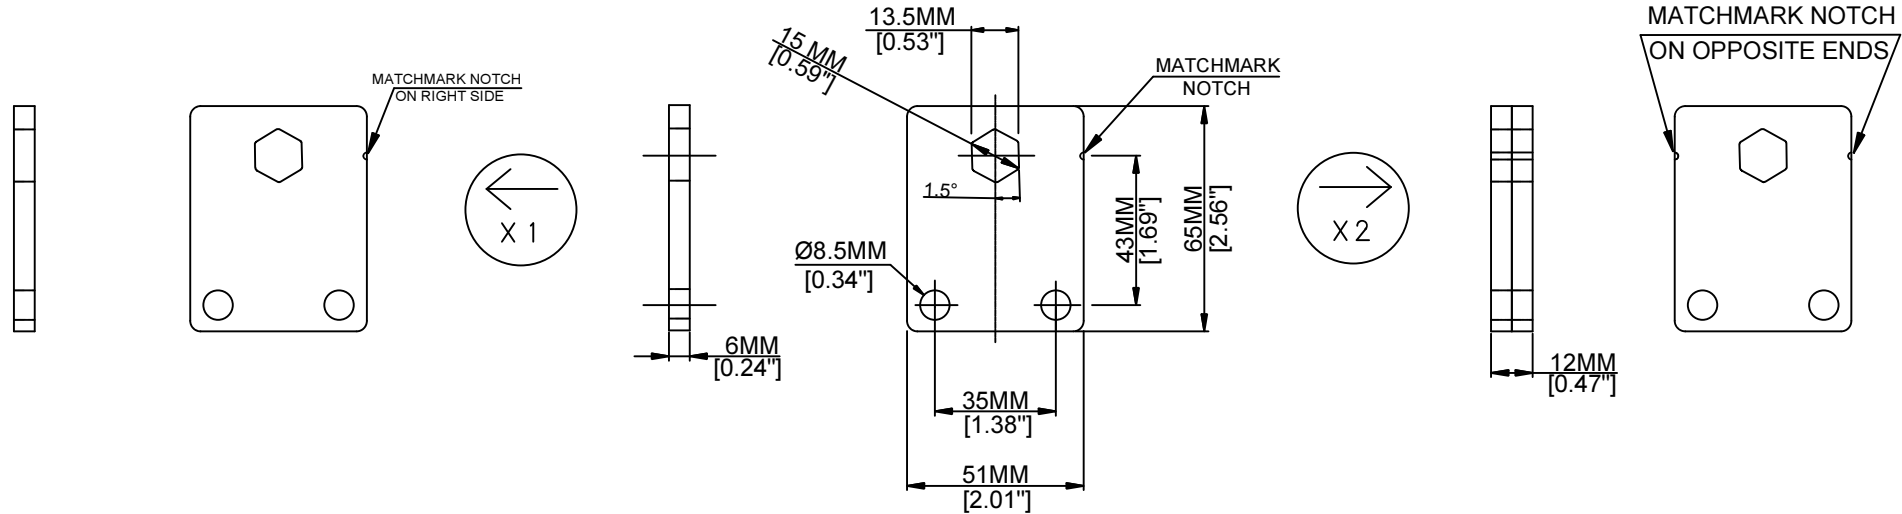

**MOUNTING HARDWARE:**

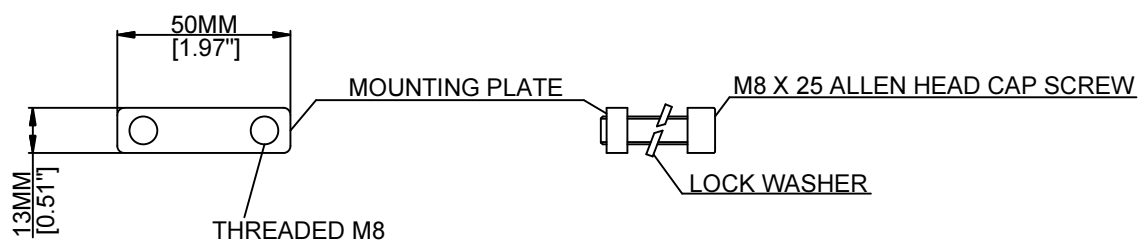

<b>ITOH DENKI USA, INCORPORATED</b>			
<b>MBK-0K1-6 AND MBK-0K1-7 MOUNTING BRACKETS</b>			
CUSTOMER:			
DRAWN BY: AJI	SCALE: NONE	DWG. NO.: C340	DATE: 08.11.15

NOTE : ALLEN HEAD CAP SCREWS ARE TO BE TIGHTENED TO 20.0 lb-ft ±10%